


A photograph of two construction workers on a steel frame at sunset. One worker is in the foreground, seen from behind, wearing a yellow hard hat and a red and yellow safety vest. The other worker is higher up, wearing a white shirt, a yellow and orange safety vest, and a face mask. The background shows a clear sky with some clouds and the warm glow of the setting sun.

DRAAKON
GROUP



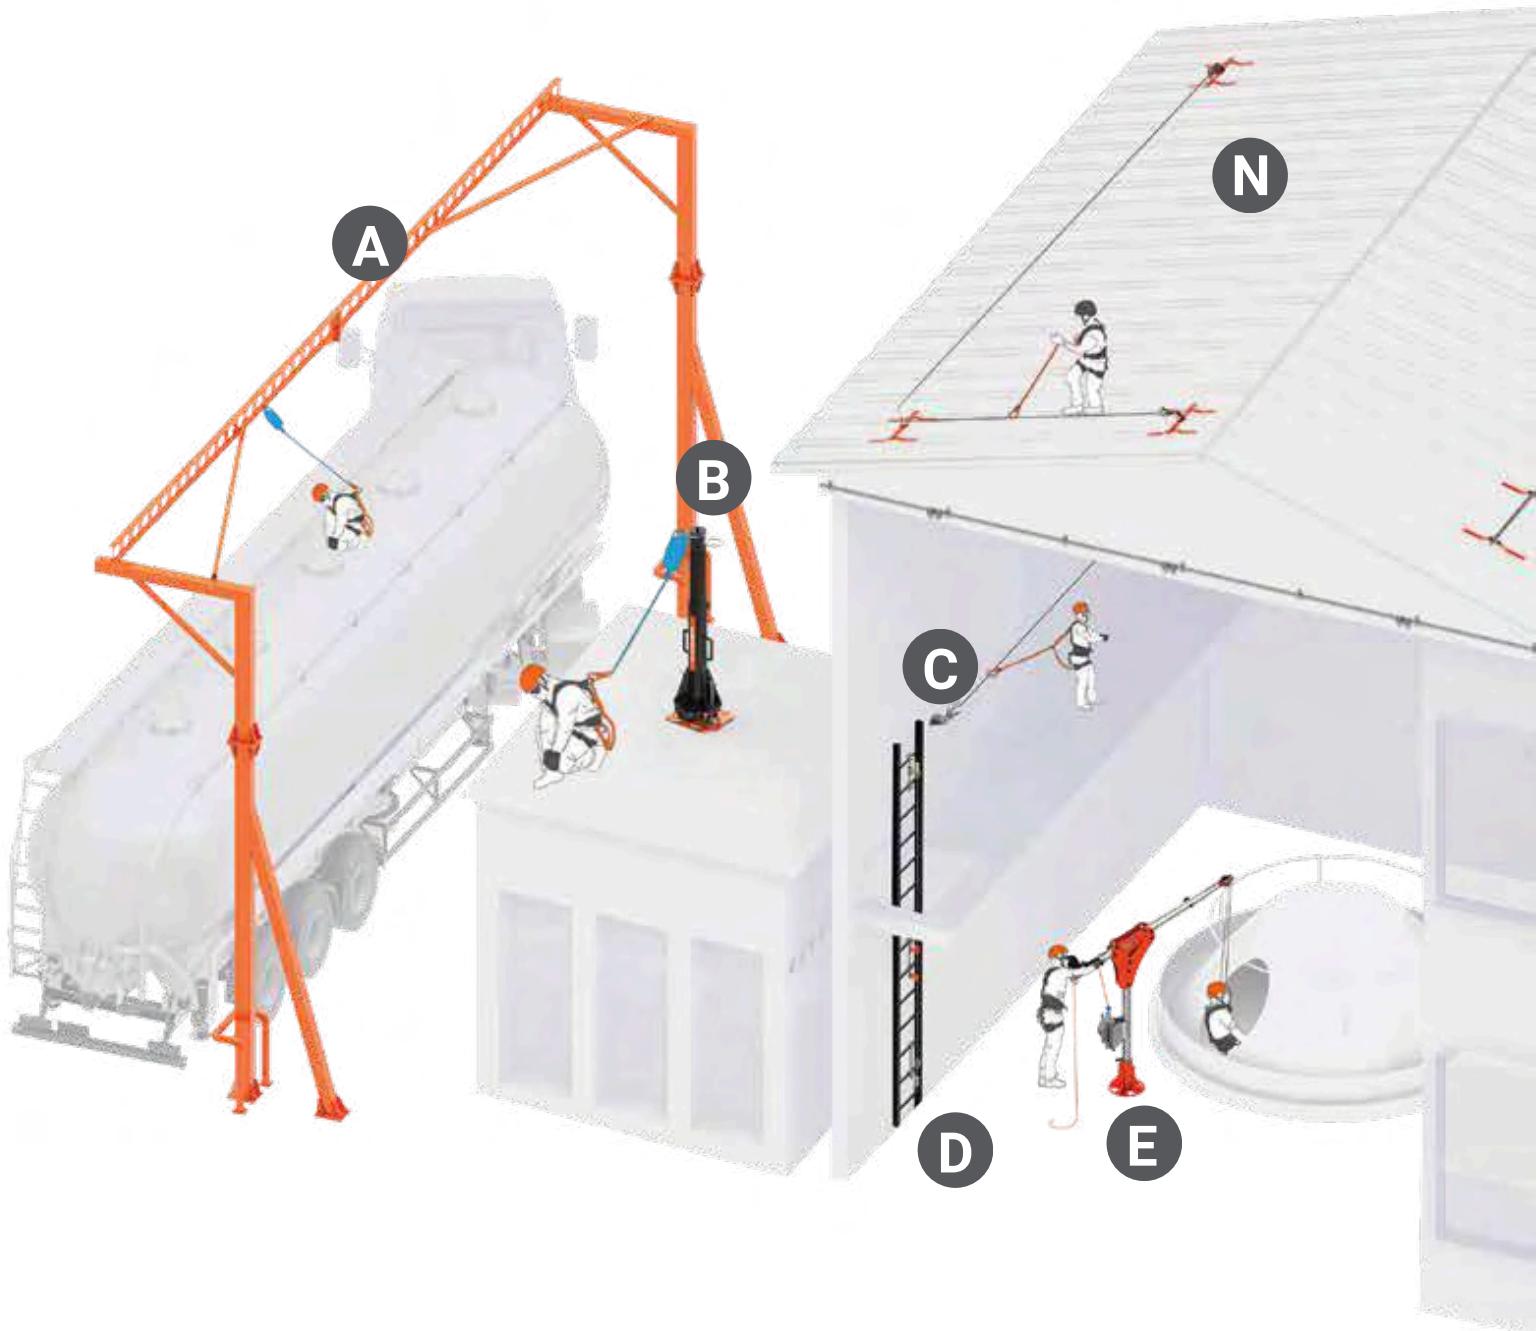

A TRUCK LOADING PLATFORM
ARAÇ ÜSTÜ ÇALIŞMA PLATFORMU

B MOBILE ANCHOR POD
MOBİL ANKRAJ DİKMESİ

C STEEL MOBILE HORIZONTAL LIFELINE
ÇELİK MOBİL YAŞAM HATTI

D VERTICAL LIFELINE
DİKEY YAŞAM HATTI

E CANTILEVER ARM
KONSOL KOL

F SAFETY NET
GÜVENLİK AĞI

G EDGE PROTECTION
KENAR KORUMA

H MOBILE TRUCK LOADING PLATFORM
MOBİL ARAÇ ÜSTÜ ÇALIŞMA PLATFORMU

I VERTICAL LIFELINE WITH LADDER EXTENSION
DKEY YAŞAM HATTI MERDİVEN UZATMALI


J MOBILE CANTILEVER ARM
MOBİL KONSOL KOL

K DEADWEIGHT
ÖLÜ YÜK

L BRIDGE SYSTEM
KÖPRÜ SİSTEMİ

M SANDWICH PANEL ANCHOR
SANDVIÇ PANEL ANKRAJİ

N HORIZONTAL LIFELINE
YATAY YAŞAM HATTI

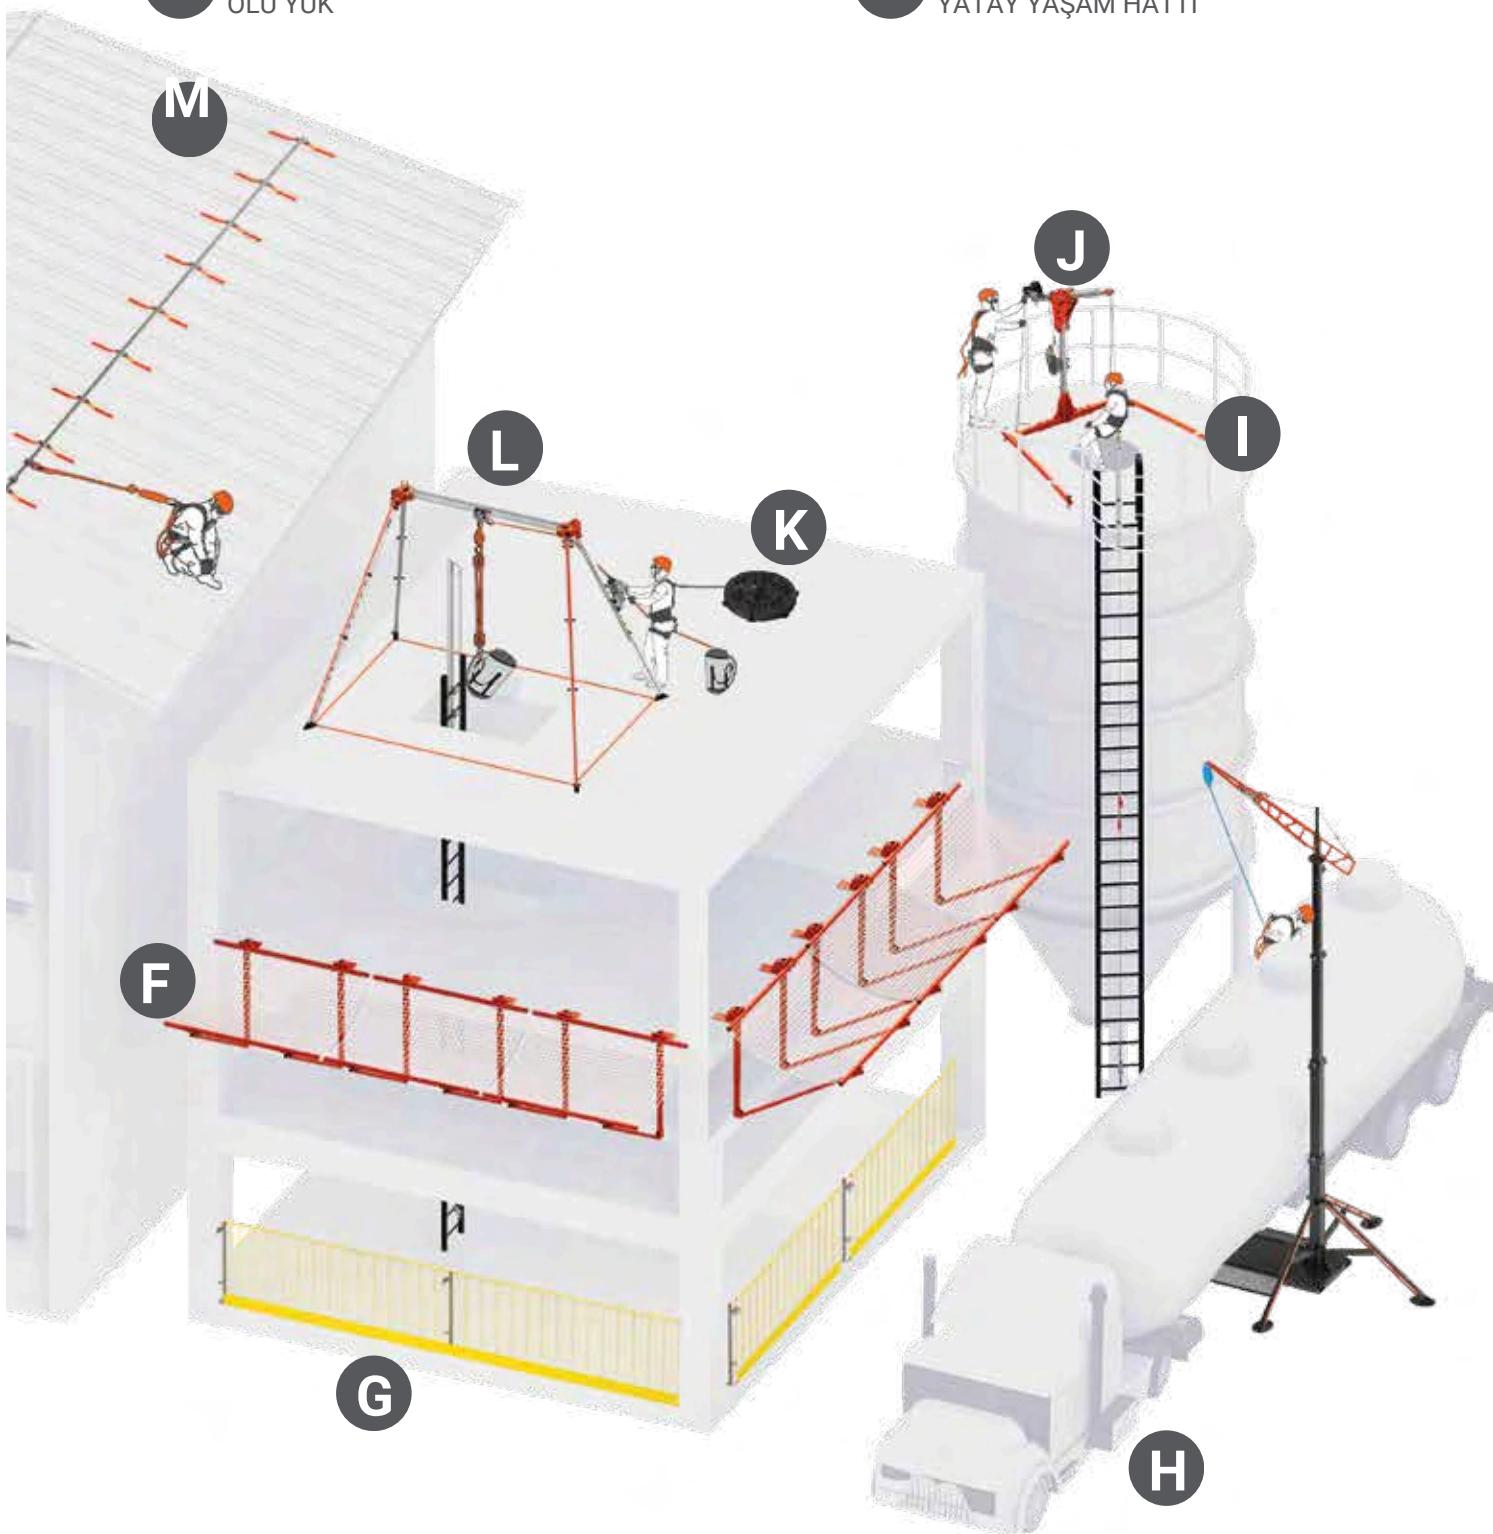



POWER ACCESS

ROPE ACCESS HARNESS
İPLE ERİŞİM KEMERİ



- Integrated chest ascender, seat-fitting earlets, auxiliary bridges on shoulders for drop-stopping equipment
- Greater control with the indicator in the ridge area providing fall traceability
- Fast wearing and high-level security thanks to automatic buckles with indicator on the legs
- Freedom of movement in walking and climbing with elastic leg columns
- User-friendly D-rings with increased ergonomics
- Organized and comfortable operation with 6 materials and 8 hand tools carrying straps
- Protected label for periodic maintenance and monitoring of product life

Size/Beden: S/M, L/XL, XXL/XXXL

Standard/Standart: EN 361, EN 358, EN 813, EN 12277, EN 1497

P-455 YO

FALL ARREST, POSITIONING AND SUSPENSION HARNESS
DÜŞÜŞ DURDURMA, KONUMLANDIRMA VE SÜSPANSİYON KEMERİ



- Fast wearing and high-level security thanks to automatic buckles with indicator
- Greater control with the indicator in the ridge area providing fall traceability
- Freedom of movement in walking and climbing with elastic leg columns
- User-friendly D-rings with increased ergonomics
- Organized and comfortable operation with 6 materials and 8 hand tools carrying straps
- Protected label for periodic maintenance and monitoring of product life

Size/Beden: S/M, L/XL, XXL/XXXL

Standard/Standart: EN 361, EN 358, EN 813, EN 12277, EN 1497

P-455 Y

FALL ARREST, POSITIONING AND SUSPENSION HARNESS
DÜŞÜŞ DURDURMA, KONUMLANDIRMA VE SÜSPANSİYON
KEMERİ



- Easily adjustable manual buckles
- Greater control with the indicator in the ridge area providing fall traceability
- Freedom of movement in walking and climbing with elastic leg columns
- User-friendly D-rings with increased ergonomics
- Organized and comfortable operation with 6 materials and 8 hand tools carrying straps
- Protected label for periodic maintenance and monitoring of product life

Size/Beden: S/M, L/XL, XXL/XXXL

Standard/Standart: EN 361, EN 358, EN 813, EN 12277, EN 1497

POWER INDUSTRY

FALL ARREST, POSITIONING, SUSPENSION AND RESCUE
HARNESS
DÜŞÜŞ DURDURMA, KONUMLANDIRMA, SÜSPANSİYON VE
KURTARMA KEMERİ



- Light weight thanks to special design anchor points
- Easy installation and high-level security thanks to its "H" type structure and automatic buckles with indicator
- Freedom of movement in walking and climbing with elastic leg columns
- User-friendly D-rings with increased ergonomics
- Organized and comfortable operation with 4 materials and 8 hand tools carrying straps
- Protected label for periodic maintenance and monitoring of product life

Size/Beden: S/M, L/XL, XXL/XXXL **Standard/Standart:** EN 361, EN 358, EN 813, EN 12277, EN 1497

P-453 O

FALL ARREST, POSITIONING HARNESS
DÜŞÜŞ DURDURMA, KONUMLANDIRMA KEMERİ



- Easy installation and high-level security thanks to its "H" type structure and automatic buckles with indicator
- Greater control with the indicator in the ridge area providing fall traceability
- User-friendly D-rings with increased ergonomics
- Organized and comfortable operation with 4 material carrying straps
- Protected label for periodic maintenance and monitoring of product life

Size/Beden: S/M, L/XL, XXL/XXXL

Standard/Standart: EN 361, EN 358

P-451 PO

FALL ARREST HARNESS
DÜŞÜŞ DURDURMA KEMERİ



- Easy installation and high-level security thanks to its "H" type structure and automatic buckles with indicator
- Greater control with the indicator in the ridge area providing fall traceability
- User-friendly D-rings with increased ergonomics
- Protected label for periodic maintenance and monitoring of product life

Size/Beden: S/M, L/XL, XXL/XXXL

Standard/Standart: EN 361

CA-2**CHEST ASCENDER KIT**
GÖĞÜS YÜKSELİŞ KİTİ**P-451 PO JACKET****FALL ARREST HARNESS**
DÜŞÜŞ DURDURMA KEMERİ

- Work safety vest integrated into the belt
- Special jacket design for quick and easy wear
- Easy to wear and high level of security thanks to automatic buckles with indicator
- Reflective tapes to increase visibility
- Ergonomically enhanced outward-facing user-friendly D-rings
- Protected label for monitoring periodic maintenance and product life

Size/Beden: S/M, L/XL, XXL/XXXL
Standard/Standart: EN 361**TS-30****TRAUMA STRAP**
TRAVMA ASKİSİ

- Special design to prevent hanging trauma after fall
- Can be used by connecting to the waist area.
- Quick and easy adjustment to leg length

Weight/Ağırlık: 200 gr

STAR

BOSUN'S CHAIR
ÇALIŞMA OTURAĞI



- Healthy and comfortable rope access works
- Lighter with fiber composite structure and unique design
- Possibility to rest by pressing the special webbing ladder while working
- Organized and comfortable working with 3 material carrying straps

Weight/Ağırlık: 1.420 gr

BK-85 A

WORK POSITIONING HARNESS (WAIST TYPE)
BEL TİPİ KONUMLANDIRMA KEMERİ



- Safe use in restraint systems
 - Attachment points that distribute the load equally on the waist when in work positioning
 - Ergonomic lumbar support
- Size/Beden:** S/M, L/XL, XXL/XXXL
Standard/Standart: EN 358

STAR COMFORT

BOSUN'S CHAIR
ÇALIŞMA OTURAĞI



- Increased seating area • Healthy and comfortable rope access works
- Lighter with fiber composite structure and unique design
- Possibility to rest by pressing the special webbing ladder while working
- Organized and comfortable working with 3 material carrying straps

Weight/Ağırlık: 1.530 gr

FB-50 L

FORRESTER BELT WITH LANYARD
ORMANCI KEMERİ LANYARDLI



- Heat resistant aramid webbing, lanyard and sewing thread
- 1,2 m long lanyard • Reflective tapes to increase visibility
- Easy adjustable buckles

Size/Beden: S/M, L/XL, XXL/XXXL

Weight/Ağırlık: 750 gr

RH-2 (Fireman)

FIREMAN HARNESS
İTFAİYECİ KEMERİ



- Safe use in environments with heat, flame and welding burrs
 - Heat resistant aramid webbing and sewing thread
 - "H" type structure for easy wearing
 - Easy adjustable buckles
- Size/Beden:** S/M, L/XL, XXL/XXXL
Standard/Standart: EN 361

BD-85

FIREMAN BELT WITH LANYARD
İTFAİYECİ KEMERİ LANYARDLI



- Custom-engineered 85 mm webbing
 - Leather coated adjusting webbing
 - 1,2 m long leather coated lanyard
 - Easily adjustable buckles
- Size/Beden:** S/M, L/XL, XXL/XXXL
Standard/Standart: EN 358

BM-45

SAFETY HARNESS (MARINE USE)
DENİZCİ KEMERİ



- Enhanced working comfort and freedom of action
 - Easily adjustable buckles
- Size/Beden:** S/M, L/XL, XXL/XXXL

M-45 AO

MINER'S BELT
MADENCİ KEMERİ



- Ergonomic lumbar support and shoulder straps for maximum comfort
 - Reflective bands to increase visibility
 - Special areas for carrying breathing kit and head lamp battery
 - Easy adjustable buckles
- Size/Beden:** S/M, L/XL, XXL/XXXL

RT-3 A

RESCUE TRIANGLE (SHOULDER STRAP) KURTARMA ÜÇGENİ (OMUZ ASKİLİ)



- Quick and easy deployment in rescue operations
 - Ergonomic shoulder straps to avoid injury in narrow and risky areas
 - Easy adjustable buckles
- Size/Beden:** Standard/Standart

BC-46 P

BOSUN'S CHAIR PROFESSIONAL (MARINE USE)
PROFESYONEL ÇALIŞMA OTURAĞI (DENİZCİ TİPİ)



- Working on sitting position for a longer period
- Enhanced comfort thanks to back support
- 2 hand tools and carrying pockets
- Easily adjustable buckles





ELASTIC SERIES

ELASTIC LANYARD WITH SHOCK ABSORBER
ŞOK EMİCİLİ ELASTİK LANYARD



CARABINER OPTIONS/KARABİNA SEÇENEKLERİ

Note/Not: Check carabiner section for more selection
Daha fazla seçenek için karabına bölümüne bakınız.

- Freedom of movement thanks to its elastic mold.
 - Minimalist design with built-in shock absorber
 - High strength protective case against external factors and working conditions
 - Easy to control ya da easy control
 - 16-110 mm gate opening carabiner options
- Length/Uzunluk:** 1,2-1,5-1,8-2 meters/metre
Standard/Standart: EN 355
E.g./Örnek: EL-3 K-4A/K-6A L: 1.2 m

BRAIDED SERIES

BRAIDED LANYARD WITH SHOCK ABSORBER
ŞOK EMİCİLİ BRAIDED LANYARD



CARABINER OPTIONS/KARABİNA SEÇENEKLERİ

Note/Not: Check carabiner section for more selection
Daha fazla seçenek için karabına bölümüne bakınız.

- Kernmantle built rope with high mantle of abrasion and UV resistance
 - More resistance against external influences thanks to rope protection case
 - Long life due to special protection sheath shock absorber
 - Easy to inspect veya easy inspection
 - 16-110 mm gate opening carabiner options
- Length/Uzunluk:** 1,2-1,5-1,8-2 meters/metre
Standard/Standart: EN 355
E.g./Örnek: E-3 B K-4A/K-6A L: 1.2 m



WPL

POSITIONING LANYARD
KONUMLANDIRMA LANYARDI



K-7/3A



K-6A



K-4/KL



K-4A

CARABINER OPTIONS/KARABINA SEÇENEKLERİ
Note/Not: Check carabiner section for more selection

- Fast and convenient use for space limitation or positioning
- Easy adjustment even during work thanks to the rope holder mechanism
- More resistance against external influences with rope protection case
- Selection of carabiners with 16-110 mm gate opening

Length/Uzunluk: 3-5-7-10 meters/metre
Standard/Standart: EN 358
E.g./Örnek: WPL K-6A/K-7/3A L: 3 m

L-1 B

SINGLE LEG BRAIDED LANYARD
TEK KOL BRAIDED LANYARD



K-7/3A



K-6A



K-4/KL



K-4A

CARABINER OPTIONS/KARABINA SEÇENEKLERİ
Note/Not: Check carabiner section for more selection.

- Kernmantle-built rope with high mantle of abrasion and UV resistance
- More resistance against external influences thanks to the rope protection case
- Easier control with contrast stitches
- Selection of carabiners with 16-110 mm gate opening

Length/Uzunluk: 1,2-1,5-1,8-2 meters/metre
Standard/Standart: EN 354
E.g./Örnek: L-1 B K-4A/K-6A L: 1.2 m

WPL WA

WORK POSITIONING LANYARD
KONUMLANDIRMA LANYARDI



K-7/3A



K-6A



K-4/KL



K-4A

CARABINER OPTIONS/KARABINA SEÇENEKLERİ

Note/Not: Check carabiner section for more selection

- Special design providing safe ups and downs for wood and concrete posts
- Fast and convenient use for space limitation or positioning

- Easy adjustment even during work thanks to the rope holder mechanism
- More resistance against external influences with rope protection cover

- Selection of carabiners with 16-110 mm gate opening

Length/Uzunluk: 3-5-7-10 meters/metre
Standard/Standart: EN 358
E.g./Örnek: WPL WA K-6A/K-7/3A L: 3 m

L-1 T

SINGLE LEG TWISTED LANYARD
TEK KOL BRAIDED LANYARD



L-1 T

SINGLE LEG BRAIDED LANYARD



K-7/3A



K-6A



K-4/KL



K-4A

CARABINER OPTIONS/KARABINA SEÇENEKLERİ

Note/Not: Check carabiner section for more selection.

- High safety and strength with three-spoke rope structure
- Less strength loss with splice structure in connection

- More resistance against external influences thanks to the rope protection case
- Selection of carabiners with 16-110 mm gate opening

Length/Uzunluk: 1,2-1,5-1,8-2 meters/metre
Standard/Standart: EN 354
E.g./Örnek: L-1 T K-4A/K-6A L: 1.2 m



RAD

POSITIONING LANYARD
KONUMLANDIRMA LANYARD

www.draakon.com.tr



CARABINER OPTIONS/KARABİNA SEÇENEKLERİ

Note/Not: Check carabiner section for more selection.



- Functional design allowing space limitation, positioning, descending, ascending and securing by itself
- Increased resistance against external factors thanks to its rope protector sleeve

Selection of carabiners with 16-110 mm gate opening

Length/Uzunluk: 3-5-7-10 meters/metre

Rope Diameter/Halat Çapı: 10,5-12,7mm

Working Load/Çalışma Yükü (WLL): 200 kg

Standard/Standart: EN 12841, EN 358, EN 15151

E.g./Örnek: RAD K-6A/K-7/3A L: 3 m

E-7

SHOCK ABSORBER
ŞOK EMİCİ



- Gradually absorb the impact force that will occur during the fall system
- Durable protective case.
- Inspect when necessary thanks to its zip fastener

Length/Uzunluk: 27 cm

Length After Complete Tearing/Açık Boy: 1,75 m

Weight/Ağırlık: 230 gr

Standard /Standart: EN 355

L-1 W

SINGLE LEG WEBBING LANYARD
TEK KOL WEBBING LANYARD



CARABINER OPTIONS/KARABİNA SEÇENEKLERİ

Note/Not: Check carabiner section for more selection.

Daha fazla seçenek için karabına bölümünü bakınız.

- Superior resistance under all conditions with high strength columns and special coating
- Easy to climb in heavy conditions thanks to its lightness
- Easier control with contrast stitches
- Selection of carabiners with 16-110 mm gate opening

Length/Uzunluk: 1,2-1,5-1,8-2 meters/metre

Standard/Standart: EN 354

E.g./Örnek: L-1 W K-4A/K-6A L: 1.2 m



LUPA® STATIC MAX

STATIC ROPE
STATİK HALAT



Dia/Çap (mm)	10,5	11	12	13	15
Type/Tip	A	A	A	A	A
Weight/Ağırlık (gr/m)	69	78	92	107	139
Breaking Load/Kopma Mukavemeti (kN)	34,7	37,5	40,5	46,5	61,8
Elongation/Uzama (%) (50-150 kg)	2,0	2,2	2,5	1,9	1,8
Sheat Slippage/Kilif Kayması (%)	0,8	1,3	0,5	0,6	1,7
Sheat Ratio/Manto Oranı (%)	36,0	42,6	35,0	36,0	26,7
Knotability/Dügümlenehilebilirlik (K)	1,0	1,1	1,16	1,15	0,9
Available Lengths/Standart Uzunluklar(m)	50, 100, 150, 200				
Standard/Standart	EN 1891				

LUPA® STATIC PRO

STATIC ROPE
STATİK HALAT



Dia/Çap (mm)	9	10	10,5	11	12
Type/Tip	B	A	A	A	A
Weight/Ağırlık (gr/m)	53	61	68	74	87
Breaking Load/Kopma Mukavemeti (kN)	24,4	30,6	29,3	33,8	37,7
Elongation/Uzama (%) (50-150 kg)	3,9	2,3	2,2	2,3	1,9
Sheat Slippage/Kilif Kayması (%)	0,6	1,0	1,6	1,8	0,9
Sheat Ratio/Manto Oranı (%)	39,2	39,9	42,7	40,9	37,3
Knotability/Dügümlenehilebilirlik (K)	0,9	0,6	0,9	0,8	1,1
Available Lengths/Standart Uzunluklar(m)	50, 100, 150, 200				
Standard/Standart	EN 1891				

LUPA® ACCESSORY

ACCESSORY ROPE
YARDIMCI HALAT



Dia/Çap (mm)	6	7	8
Weight/Ağırlık (gr/m)	25,2	31,8	43,2
Breaking Load/Kopma Mukavemeti (kN)	9,9	12,5	14,1
Available Lengths/Standart Uzunluklar(m)	50, 100, 150, 200		
Standard/Standart	EN 564		

ARAMID FIGHTER

FIREFIGHTER ROPE
İTFAIYECİ HALATI




- Core protecting flame resistant sheath
- Working temperature up to 300°C
- Excellent hand grip
- High friction resistance
- Low elongation
- Özü koruyan ısuya ve aleve dayanıklı manto
- 300 °C'ye kadar çalışabilme özelliği
- Mükemmel elle tutuş
- Yüksek sürtünme dayanımı
- Düşük esneme

Dia/Çap (mm)	8	10	11	12	14	16
Weight/Ağırlık (kg/m)	5,6	8,75	10,58	12,6	17,15	22,4
Breaking Load/Kopma Mukavemeti (kN)	2.100	3.180	4.000	4.600	6.200	8.000
Available Lengths/Standart Uzunluklar	50 m, 100 m, 150 m, 200 m					

RL-46

STRETCHER SLING
SEDYE SAPANI

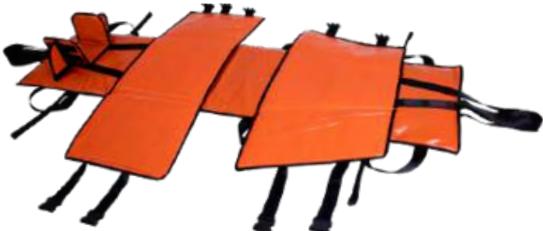

- High strength outer body and inner area
- 12 holding spaces on each side
- Use with vacuum stretcher and spine board

Content/İçerik:

3 patient immobilization belts/3 adet yaralı tespit kemeri

Optional/Opsiyonel:

RL-4E stretcher carrying sling/RL-4E sedye taşıma sapanı

Stretcher Dimensions/Sedye Ölçüleri: 63*217*20cm

Carrying Capacity/Taşıma Kapasitesi: 175 kg

Weight/Ağırlık: 14 kg

Standard/Standart: EN 1865

RL-10

STRETCHER
SEDYE



- Practical and fast evacuation from narrow/rugged area thanks to the design surrounding the victim
- Horizontal and vertical axis use
- Easy to use by one person with its friction resistant structure and additional pulling system
- Rollability for easy transport and storage

Content/İçerik: 1 pull-out platform/1 adet çekme perlonu 2 high-strength evacuation slings/2 adet yüksek mukavemetli tahliye sapanı 4 holding pylons/4 adet tutma perlonu 2 high strength carabiner/2 adet yüksek mukavemetli karabina 6 steel buckle security tensioner/6 adet çelik tokali güvenlik gergisi 10 meter static rope/10 metre statik halat 1 carrying case/1 adet taşıma çantası

Weight/Ağırlık: 8,4 kg

Material/Malzeme: HDPE

Standard/Standart: EN 1865

Bag Dimensions/Çanta Ölçüleri: 31cmx95cm (dia/çap x boy/length) **Stretcher**

Dimensions/Sedye Ölçüleri: 27cmx93cmx250cm (dia/çap x width/en x boy/length)

RL-4

BASKET STRETCHER (PLASTIC)
SEPET SEDYE (PLASTİK)



- High strength outer body and soft inner area
- 12 holding spaces on each side
- Use with vacuum stretcher and spine board

Content/İçerik: 3 patient immobilization belts/3 adet yaralı tespit kemeri

Optional/Opsiyonel: RL-4E stretcher carrying sling/RL-4E sedye taşıma sapanı

Stretcher Dimensions/Sedye Ölçüleri: 63*217*20cm

Carrying Capacity/Taşıma Kapasitesi: 175 kg

Weight/Ağırlık: 14 kg **Standard/Standart:** EN 1865

RL-5

SCOOP STRETCHER
KAŞIK SEDYE



- Due to the ability to split in half, the injured person can be taken on a stretcher without being moved.
- Automatic locking mechanism
- High strength outer body

Content/İçerik: 2 injured identification belts/2 adet yaralı tespit kemeri

Stretcher Dimensions/Sedye Ölçüleri: 44*210*6 cm

Carrying Capacity/Taşıma Kapasitesi: 150 kg

Weight/Ağırlık: 10,5 kg **Standard/Standart:** EN 1865





EVO®8 Mid Peak Wheel Ratchet Vented

The Mk®8 Evolution® safety helmet was the first industrial hard hat in the world to meet and exceed the far tougher head protection standard EN 14052 - this was the biggest advance in industrial head protection in over 45 years. The EVO®8 safety helmet is designed for today's highest risk environments where high impact / side-impact situations are a concern such as Construction, Mining, Tunnelling, Demolition, Oil and Gas, Offshore Marine, Refinery and Petrochemical, High-Pressure Jetting and certain Emergency Services. EN 14052 is specified into EN 1789 as a mandatory requirement for each crew member for type B & C road ambulances.



ESSAFE GE 1548

Can be stored and transported in their original cartons at ambient temperature (0°C to + 30°C) May be stored in the dark for up to 3 years. Do not store in direct/high heat or sunlight as this may distort the shell The Essafe helmet has an in-use life of up to 3 years Excessive wear and tear can considerably reduce the lifespan of the product



UVEX PHEOS B SAFETY HELMET

Penetration resistance against sharp and pointed objects, Chin strap opening between 150 and 250N, Vertical shock absorption. Additional accessoires, Safety earmuffs and visors (Euroslots 30 mm)

DYNAMO 397 KAYASAFETY

Visor free design for more comfortable vision Absorbs shock with outer shell deformation Perfectly fits on head thanks to 4-point textile suspension system Up/down adjustment for ear area and adjustable/removable chin band Special slots and clips for attaching headlight, headphones and visor

DRAAKON

SAFETY EYEWEAR





UVEX PHEOS CX2 SPECTACLES

Optimum eye protection in all situations: The soft component connected directly with the lens offers reliable protection against dust and water. The innovative uvex X-tended Eyeshield adapts perfectly to the wearer's face – for excellent wearer comfort and 100 % protection.



HONEYWELL SVP400 SERIES

Polycarbonate lens available with K&N coating: anti-fog and/or anti-scratch 9-base wraparound lens for full protection and better field vision
Comfort improved by rubber, dual-material, non-slip temple tips
Cushioned nose bridge U6 grade-level lens filters > 99.9% UVB/UVA for far and near UV transmittance Available in Clear and Gray frames, and 4 lens tints including Indoor/Outdoor and Silver Mirror



3M™ OX™ SAFETY GLASSES

For workers with prescription glasses, 3M™ OX™ Protective Eyewear offers an extended field of vision with its wide profile. Its seamless lens with built-in sideshields secures an uninterrupted sight range with over-the-glass coverage. OX protective eyewear increases comfort and delivers a flexible, polycarbonate construction with over-the-glass coverage.



DELTA PLUS CLEAR SAFETY GOGGLES

Has a flexible nylon frame and an adjustable strap that tilts to enhance comfort and better allow for long wear times
Polycarbonate lens provides strong resistance to impact, is scratch resistant and will block UV light
Suitable to be worn over glasses and with disposable respiratory masks

DRAAKON

SAFETY EYEWEAR







WORK GLOVES (HEAVY)

These gloves provide the perfect balance between comfort, dexterity and protection. The lycra content and micro foam nitrile coating in the lining make the glove much softer and more flexible. In this way, it provides a much superior grip and comfortable movement without squeezing your hands or making them sweat. It is resistant to wear and tear for a long time. It is REACH compliant.



IMPACT GLOVES

Tough jobs call for tough gloves. New Rig Dog gloves are made to keep your team safe and in control when handling hazardous oily surfaces. They provide enhanced impact protection, they meet the EN388:2016 and have been developed to achieve the highest level of impact protection (level 3) from ANSI/ISEA 138 to be published in 2019. Special additional layers provide F ISO cut level resistance, guard against abrasions and enhance grip. Made to be highly breathable and reduce hand fatigue, so they are comfortable to wear during long shifts.



WORK GLOVES

Gloves grip the hand better and provide comfortable use with its cotton-lined texture, knit wristband and special mold.



WELDING GLOVES

It is used in welding industries in many industries, in the transportation and cutting of metal parts, in assembly and coating processes, in heavy metal processes, in injection molds, in the use of cold and hot parts, in repair, mining, freight transportation and in the iron and steel industry. It is suitable for use in deburring and hot metal processes in the automotive and iron and steel industries, and for working with sharp-edged sheets and metals.





FULL FACE MASKS

Dräger X-plore 5500 full face masks are designed on the basis of the proven and reliable technology of Panorama Nova. The double-layer face seal with triple sealing action ensures reliable protection and a secure, leak-free seal regardless of your face shape.

KN95 + FILTER

For single shift use respirators (NR), the clogging test is optional. For reusable respirators this test is mandatory. The respirators are loaded with very high amount of Dolomite dust which will tend to clog the filter. After loading with the required amount of dust, the breathing resistance of the respirators shall not exceed the following limits.



HALF MASKS

Engineered as a lightweight, durably soft half mask, HM500 ensures better comfort and convenience – particularly for extended wear.



PARTICLE MASKS

FFP3 breathing protection preformed mask. APF 20
Exhalation valve. Ergonomic fit
Labelled for use with high levels of dust exposure (D)
Comfortable, four-point headband attachment

DRAAKON

SAFETY SHOES





BE-BROWN TOP

- S3 CI SRC
- UPPER: Water-resistant waxy leather
- LINING: SmellStop
- MIDSOLE: Fresh'n Flex
- TOE-CAP: SlimCap
- SOLE: Antifatigue AirTech + Tpu-Skin® Technology 4x4
- Size Range: 36-50



I-ROBOX TOP

- S3 CI ESD SRC
- UPPER: water-resistant Nabutek leather
- LINING: SmellStop
- MIDSOLE: Fresh'n Flex
- TOE-CAP: SlimCap
- SOLE: Antifatigue AirTech + Tpu-Skin®
- Size range: 35-48



I-WIRE

- S3 ESD SRC
- UPPER: water-resistant technical textile
- LINING: SmellStop
- MIDSOLE: Fresh'n Flex
- TOE-CAP: SlimCap
- SOLE: Antifatigue AirTech + Tpu-Skin®
- Size range: 35-48



T-WALL MID

- S3S HRO CI HI LG SC FO SR
- UPPER: Water-repellent greased leather
- LINING: SmellStop antiodor and antibacterial
- MIDSOLE: Fortrex system
- TOECAP: SlimCap
- SOLE: PU/HRO rubber
- Sizes: 36-48



T-ROBUST TOP

- S7S HRO CI HI LG SC FO SR
- UPPER: Water-repellent greased leather with H2STOP membrane
- LINING: Primaloft
- INSERT: Fortrex system
- TOECAP: SlimCap
- SOLE: PU/HRO rubber
- Sizes: 36-48

SPARKLE

- S3 HRO CI HI SRC
- UPPER: Water-resistant waxy leather
- LINING: SmellStop
- MIDSOLE: Fresh'n Flex
- TOE-CAP: SlimCap
- SOLE: Double-density Air Tech PU/HRO
- Size Range: 39-48



K-BALANCE

- S1P HRO SRC
- UPPER: Breathable fabric
- LINING: SmellStop
- MIDSOLE: Fresh'n Flex
- TOE-CAP: Aluminium
- SOLE: Double-density AirTech PU/HRO Rubber i-daptive® Technology
- Size Range: 36-48

COMBO-X 100

- PU/PU Outsole
- High quality, water resistance 1.8 mm suede microfiber upper
- Breathable textile lining
- %50 lighter 200J composite toe cap
- Kevlar midsole (Optional)
- ESD outsole (Optional)
- High Density ESD Carbon Insole
- 35/48 size range





CLASS-X 10

- PU/PU Outsole
- High quality 1.8-2.0 mm grain barton cow leather upper
- Breathable textile lining
- %50 lighter 200J composite toe cap
- Kevlar midsole (Optional)
- Anatomic sponge insole
- 35/48 size range



CLASS-X 12

- PU/PU Outsole
- 1.8-2.0 mm suede leather upper
- Breathable textile lining
- %50 lighter 200J composite toe cap
- Kevlar midsole (Optional)
- Anatomic sponge insole
- 35/48 size range



COMBO-XL 950

- PU/PU Outsole
- Rubber outsole. HRO 300(Optional)
- High quality, water resistance 1.8-2.0 mm pull up-crazy leather upper
- PRO-TEX water proof upper (Optional)
- COOLMAX lining
- %50 lighter 200J composite toe cap
- Kevlar midsole
- High Density ESD Carbon Insole
- Nifco smart lacing system
- 35/48 size range



OIL-XL 50

- PU/PU Outsole
- High quality, water resistance 1.8 mm microfiber upper
- Breathable textile lining
- %50 lighter 200J composite toe cap
- Kevlar midsole (Optional)
- ESD outsole (Optional)
- High Density ESD Carbon Insole
- 35/48 size range

HQ

DRAAKON ULUSLARARASI TİCARET A.Ş

Ramazanoğlu Mah. Karşıgeçit Sok.
Hisar Sanayi Sit. No:42 Pendik / İSTANBUL
Ph: +90 216 706 3034

DRAAKON ANKARA

Ergazi Mah. 1803 Cd. Batı Prestij İş Merkezi
B Blok No:13/17 Yenimahalle / ANKARA

SEA DRAAKON LTD.

54, Green Lanes, Newington Green, London, UK N16 9NH
Ph: +44 20 3289 2121
www.seadraakon.com

DRAAKON LLC.

30 N Gould ST
Suite 26212
Sheridan, WY 82801

NT ENGROS AS.

Brobekkveien 100E 0582 OSLO NORWAY

SH-ZAZ GLOBAL TRADING JV.

22nd St, Al Marabea Road,
Al Quoz Industrial Area 3
Dubai – UAE
Ph:(971) 54424 75 63-82

NETHERLANDS BRANCH SOON...

